

Logo as painted by the robot



Original logo

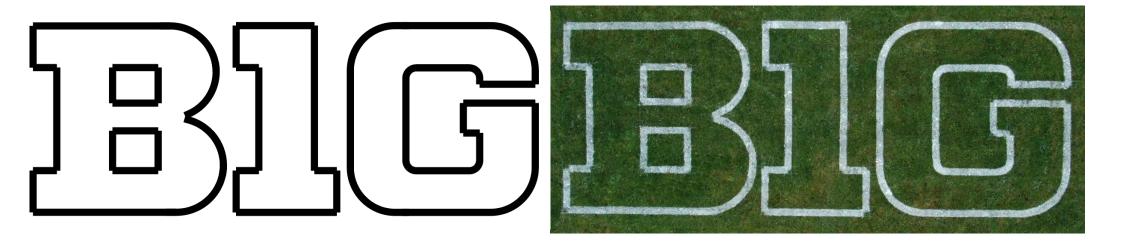


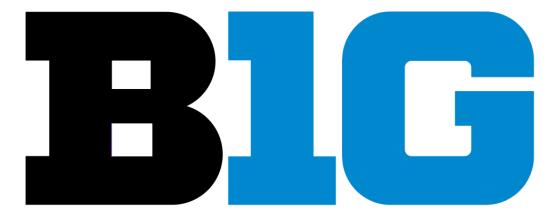

Big 10

Logo layers

The purpose of the layer split is to provide the option of having the "B" in a different color than "IG".

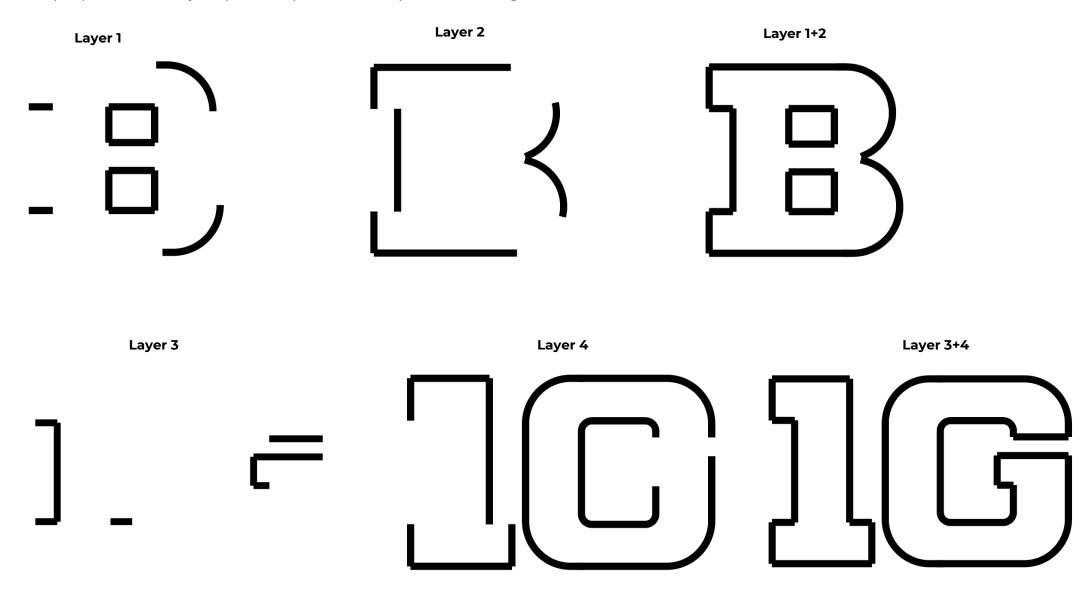



Big 10

Please note SEC

- The logo is an outline logo.
- · The logo is meant as a stencil which require manual finishing.
- Logo is 8 yards in width.
- · Logo isn't scalable. Fixed size.
- Slow speed must be applied.
- Must be painted with 4 inch line width.
- Fill is not possible by robot. Manual only.
- Center on flag 1 is the only align method available.
- Paint drying time in between layers is recommended to reduce paint tracking.
- When loaded onto map the lines will look out of place. No current fix.
- With bounding box option, the robot follows a rectangular shape which encompass the logo. The bounding box also contains a horizontal and vertical center line to make it easier to see where the logo center is (i.e. you want the logo center to be on a yard line).
- Position of the Sprayer determines the Bounding Box. Don 't look at where the discs are.
- If Bounding Box option is enabled the robot will not start to paint. Disable Bounding Box option to start painting when ready.
- Total robot operation time: approx. 15 min (waiting for the paint to dry in between layers isn't included).
- Expected paint consumption: 0.4 gallons.
- · Good sprayer offset and calibration is highly required.
- It is recommended to do a test paint at a non-important location just to get a "feel" for the logo.




Big 10


General steps

1) Place flag 1 where you want the logo center to be, and flag 2 to determine the orientation. Perpendicular orientation is recommended.

Flags from a copied plan can also be used if needed (requires shape change to logo). The further away Flag 2 can be placed from Flag 1 the more accurate the orientation will be.

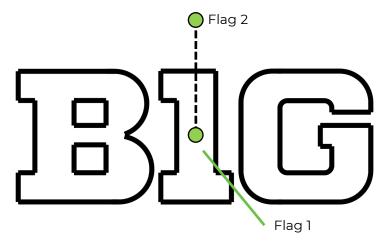

2) Verify with bounding box the logo´s position and if needed. Bounding box is not painted. Bounding Box is enabled through the Options.



- **3**) When logo position is correct, disable the bounding box option.
- 4) Enable Layer 1 and load with "Slow" speed.
- 5) Paint Layer 1
- **6**) Once Layer 1 is finished it is recommended to wait for the paint to dry before continuing with Layer 2.
- 7) Disable Layer 1
- 8) Enable Layer 2 and load with "Slow" speed.
- 9) Paint Layer 2
- **10)** Once Layer 2 is finished it is recommended to wait for the paint to dry before continuing with Layer 3. Since layer 3+4 is the "1G" you may switch color depending on logo color preference.
- 11) Disable Layer 2
- 12) Enable Layer 3 and load with "Slow" speed.
- 13) Paint Layer 3
- **14**) Once Layer 3 is finished it is recommended to wait for the paint to dry before continuing with Layer 4.
- **15**) Disable Layer 3
- 16) Enable Layer 4 and load with "Slow" speed.
- 17) Paint Layer 4

